

HIKVISION




مدينة الأعمال
BUSINESS CITY



Hikvision Fever Screening Solutions

Fever Screening Process and Typical Application Scenarios

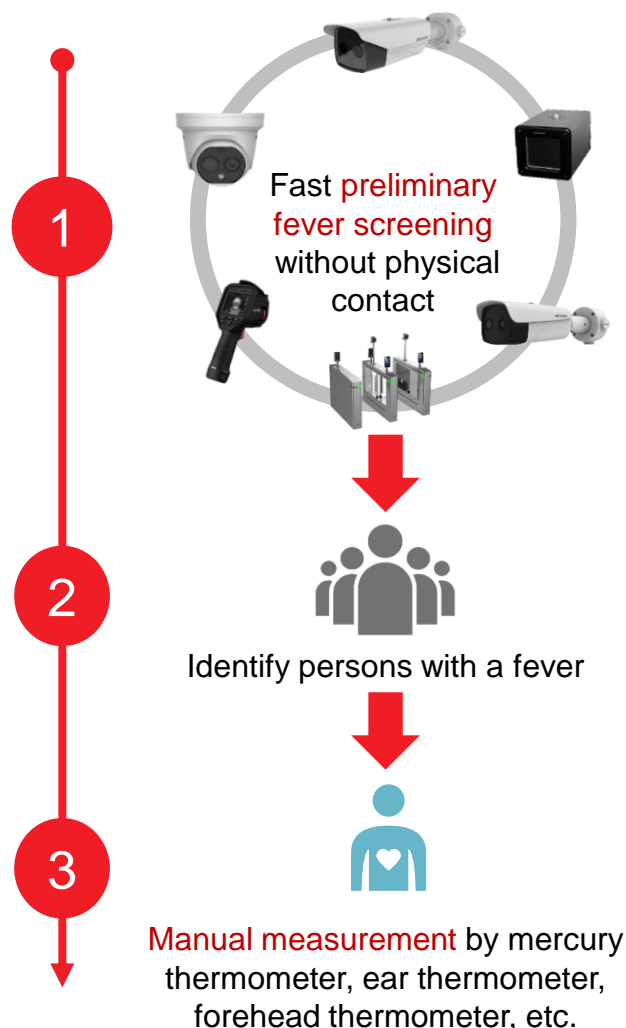

Scenario 1



Long-term fever screening for crowds in open areas

Scenario 2



Fever screening by patrolling inspectors

Scenario 3



Short-term fever screening at entrances

Scenario 4



Long-term fever screening with access control (new project)

S

SAFE

Non-contact, long range and high accuracy, reducing risks of cross-infection

E

EFFICIENT

Efficient, auto alarm triggering, greatly reducing labor costs

A

ADAPTABLE

Multiple product types, easy to deploy, suitable for various scenarios

T

TRACEABLE



Combining temperature, image and human body recognition for easy and informed management

Long-term Fever Screening for Crowds in Open Areas


Group Fever Screening with High Efficiency

Solution Details

- For long-term preliminary **fever screening of crowds with high efficiency** (indoor), simultaneous fever screening for **multiple persons (Up to 30 persons)**
- The blackbody is used as a calibrator to **improve the accuracy to $\pm 0.3^{\circ}\text{C}$**
- Centralized management** of access control with temperature records

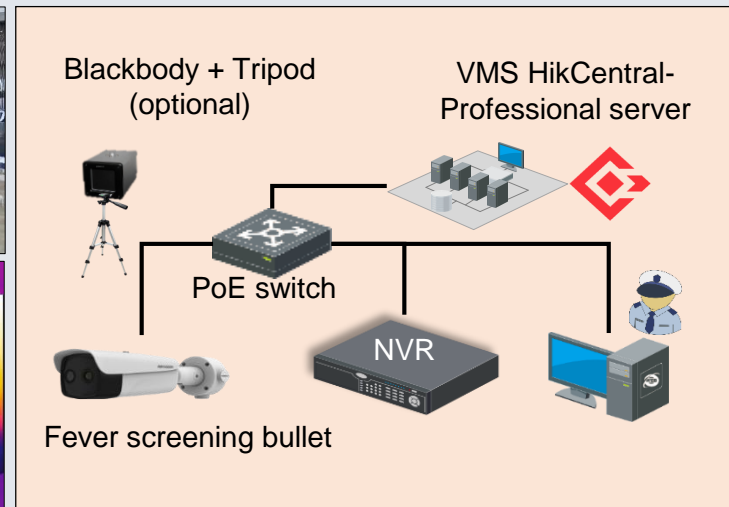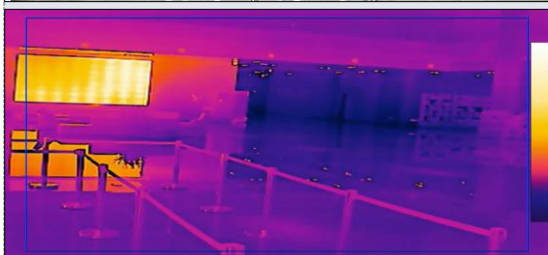

Fever screening bullet



Wall-mounted bracket



PoE switch



Blackbody (optional)



HikCentral Professional



Tripod (optional)


Product Information

- Thermal: 384×288 , lens: 10/15 mm
- Optical: 2688×1520 , lens: 4/6 mm
- Simultaneous fever screening for **multiple persons (up to 30 persons)**
- Accuracy: $\pm 0.5^{\circ}\text{C}$**
- Measurement range: $30\text{--}45^{\circ}\text{C}$
- Working temperature: $10\text{--}35^{\circ}\text{C}$
- AI human body detection** reduce the false alarms of fever screening



DS-2TD2636B-15/P

DS-2TD2637B-10/P

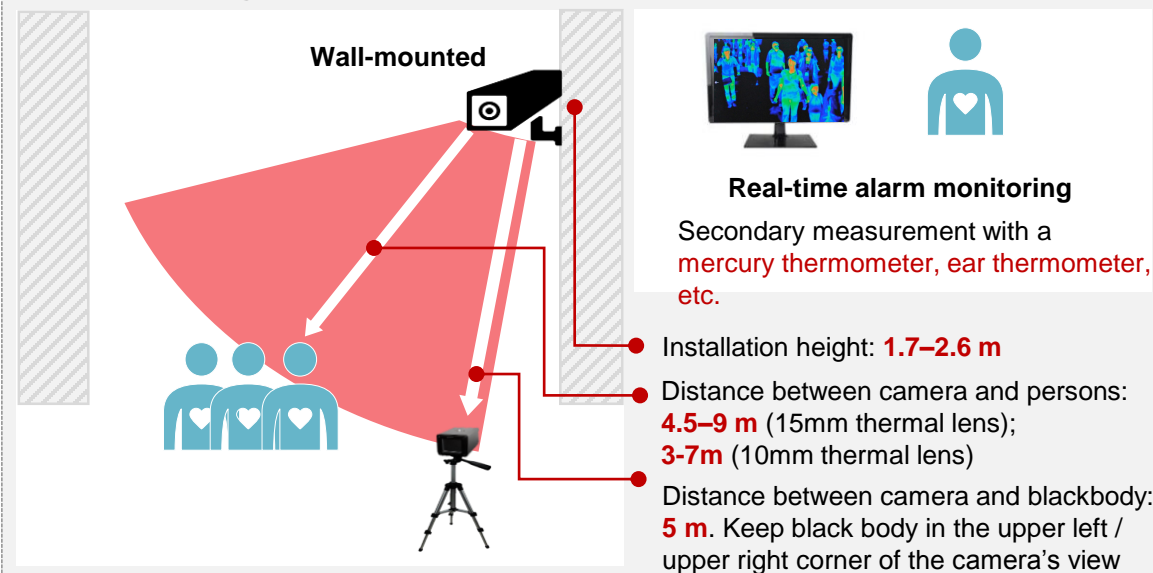

Application Scenarios

Note: Indoor installation recommended. The fluctuation in outdoor ambient temperatures influences the accuracy of temperature measurement.

Hospital



The nurse station or information desk is the place where the potential patients will consult and gather. So the fast preliminary fever screening is quite needed here.

Airport Transport Station



The passenger channels at the airport or other transport stations are the important locations where passengers arrive and need the fast preliminary fever screening.

Office Building



Corridors of buildings are the regular areas where most of the employees pass through. This location can be a daily internal screening point.

Fever Screening by Patrolling Inspectors

Anytime, Anywhere, Just One Click

Solution Details

- For preliminary fever screening by spot-checking inspectors (**indoor**)
- Fever screening without disturbing a person occupied with work
- Recommend to do the measurement **5 min after** a person enters the indoor space




Product Information

- Thermal resolution: 160 × 120;
- Optical resolution: 640 × 480;
- **Accuracy: ±0.5°C**
- Measurement range: 30-45°C
- 3.5" LCD touch screen
- Supports **Wi-Fi hotspot**, automatic screenshots of a person with a fever & uploading to the Mobile Client (Hik-Thermal) as evidence
- Supports real-time **audio alarm**
- Operation time: **4-5 hours**



DS-2TP21B-6AVF

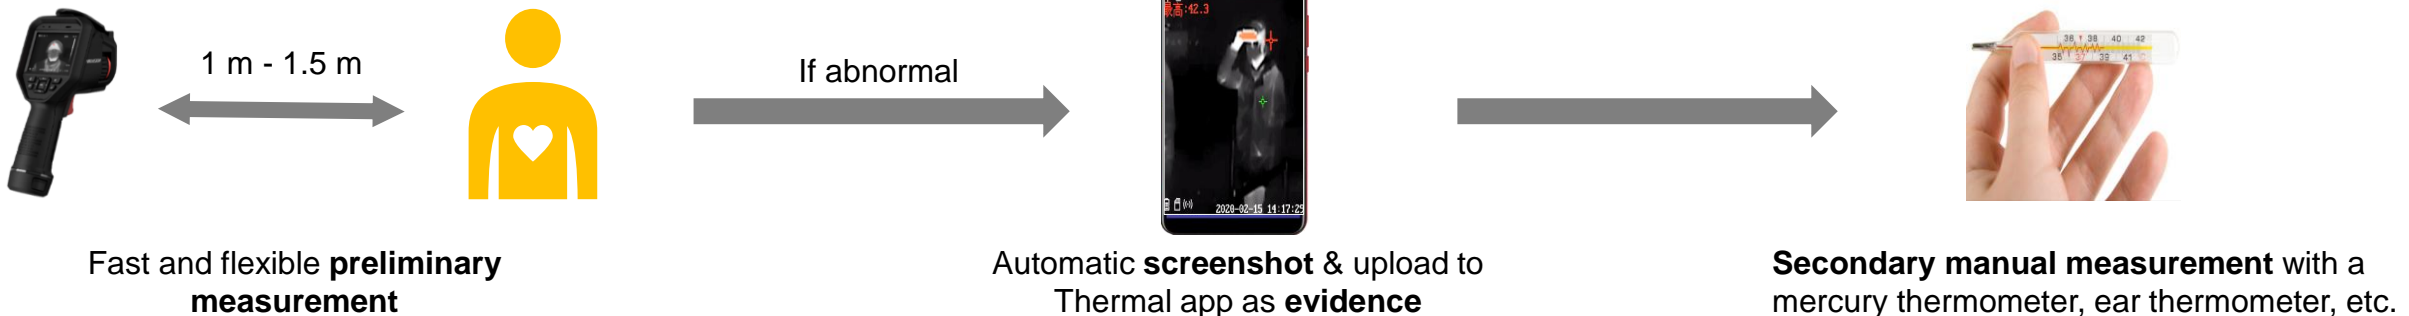

Fast and flexible **preliminary measurement**

Automatic **screenshot** & upload to Thermal app as **evidence**

Secondary manual measurement with a mercury thermometer, ear thermometer, etc.

Application Scenarios

Note: Indoor installation recommended. The fluctuation in outdoor ambient temperatures influences the accuracy of temperature measurement.

Factory Workshop



Office Building Office area



School Entrance of classroom






Bank Entrance of branch

3 Short-term Fever Screening at Entrances – Bullet/Turret Camera Based

Cost-effective: 1 camera with 2 lenses, empowered by AI for Fever screening

Solution Details

- For building entrances, elevator halls, airport security checks, etc.
- Indoor space without wind
- Recommend to set up a route to guide the flow
- Recommend to do fever screening 5 min after a person enters the indoor space
- Use the blackbody as a calibrator for screening to improve the accuracy to $\pm 0.3^{\circ}\text{C}$

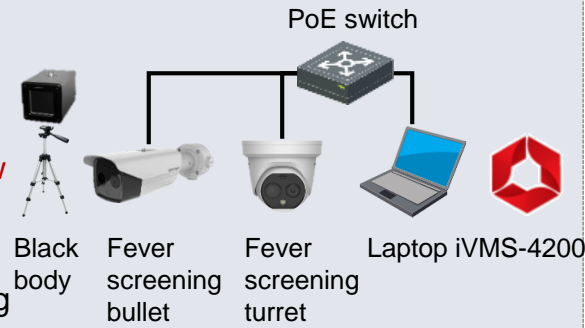


Product information



DS-2TD1217B-3/6 PA
DS-2TD2617B-3/6 PA

- Thermal: 160×120 , lens: 3 mm / 6 mm
- Optical: 2688×1520 , lens: 4 mm / 8 mm
- Accuracy: $\pm 0.5^{\circ}\text{C}$ ($\pm 0.3^{\circ}\text{C}$ with blackbody)
- Measurement range: $30\text{--}45^{\circ}\text{C}$
- Working temperature: $10\text{--}35^{\circ}\text{C}$
- Embedded audio alarm for abnormal temperatures
- AI human body detection increases the precision of fever screening

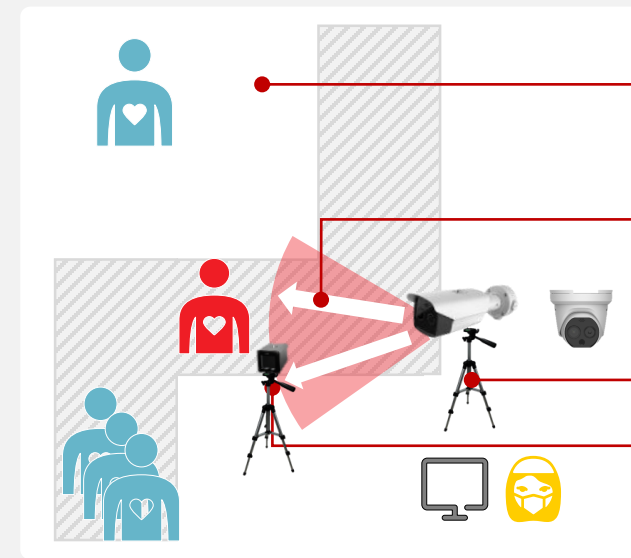

Secondary measurement with a mercury thermometer, ear thermometer, etc.

Distance between camera and persons: 0.8-1.5 m (3 mm lens)
1.5-2 m (6 mm lens)

Installation height is 1.5 m


Distance between camera and blackbody calibrator: 1 m (3 mm lens), 2 m (6 mm lens). Keep the blackbody in the upper left / upper right corner of the camera's view

Short-term Fever Screening at Entrances – Handheld Camera Based

Wireless, Flexible, Fast Deployment

Solution Details

- For building entrances, elevator halls, airport security checks, etc.
- **Wireless** deployment without cables (by the app or the iVMS-4200 client)
- **Indoor space** without wind
- **Recommend to set up a route to guide the flow**
- Recommend to do fever screening **5 min after** a person enters the indoor space

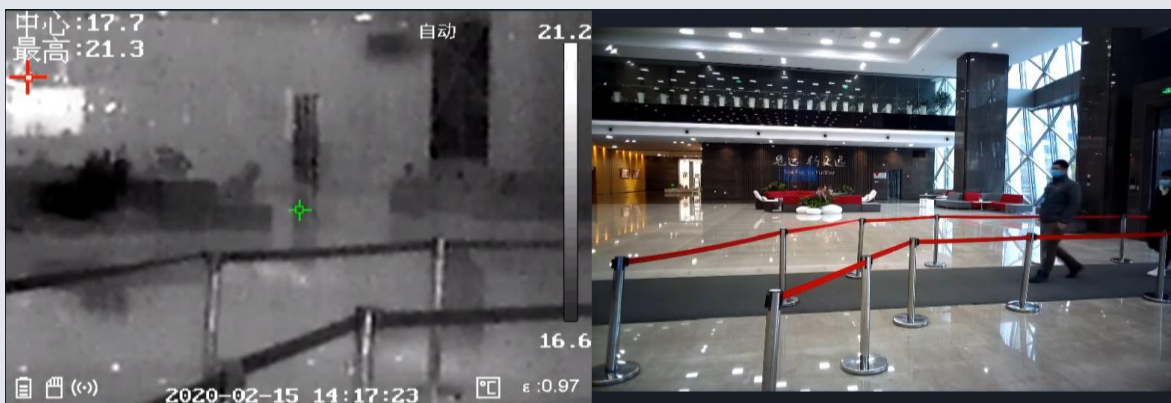

Tripod



Handheld thermographic camera



Hik-Thermal app



Laptop



iVMS-4200



Hotspot

Handheld thermographic camera




Product Information

- Thermal resolution: 160 × 120 ;
- Optical resolution: 640 × 480 ;
- **Accuracy: ±0.5°C**
- Measurement range: 30-45°C
- 3.5" LCD touch screen
- Supports **Wi-Fi hotspot**, able to live view on PC or mobile client, relieves eye fatigue
- Supports real-time audio alarm and automatic uploading of screen captures



DS-2TP21B-6AVF

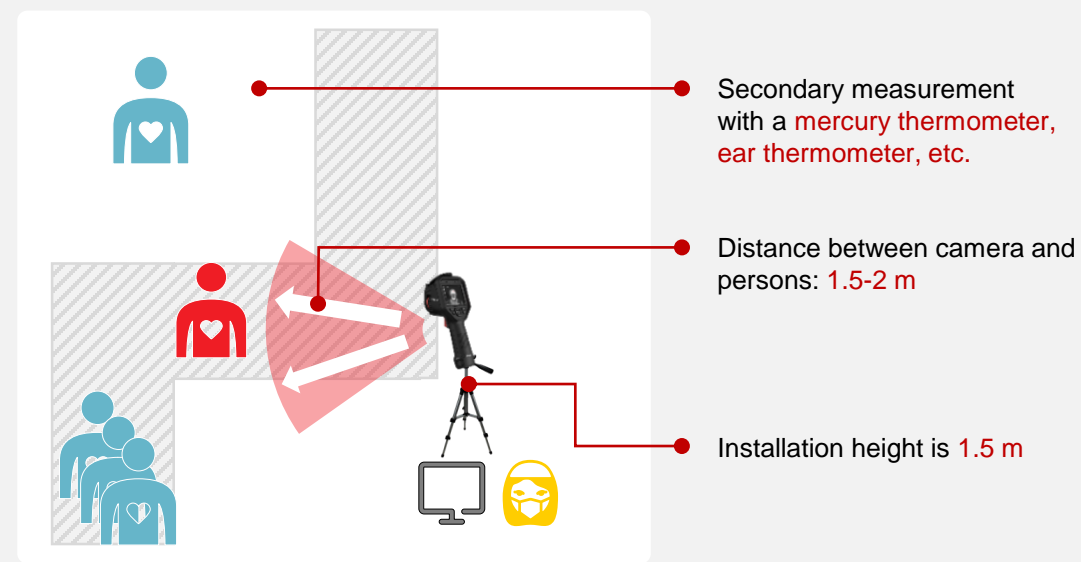

Application Scenarios

Note: Indoor installation recommended. The fluctuation in outdoor ambient temperatures influences the accuracy of temperature measurement.

School



Entrance of college building



Entrance of dormitory

Retail



Entrance of supermarket



Entrance of restaurant

Office Building




Elevator hall of parking lot



Entrance of office building

Airport

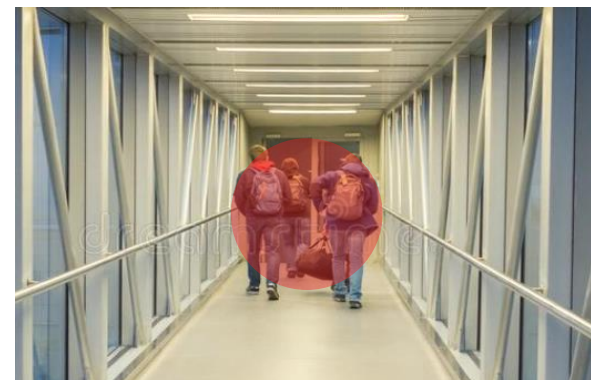

Jet bridge for departure & arrival flight





Entrance of terminal

Long-term Fever Screening with Access Control (new project)

Duo Protection without A Touch



Solution Details

- Long-term fever screening with access control for building related projects
- Indoor space
- Recommend to do fever screening **5 min after** a person enters the indoor space
- **Centralized management** of access control with temperature records

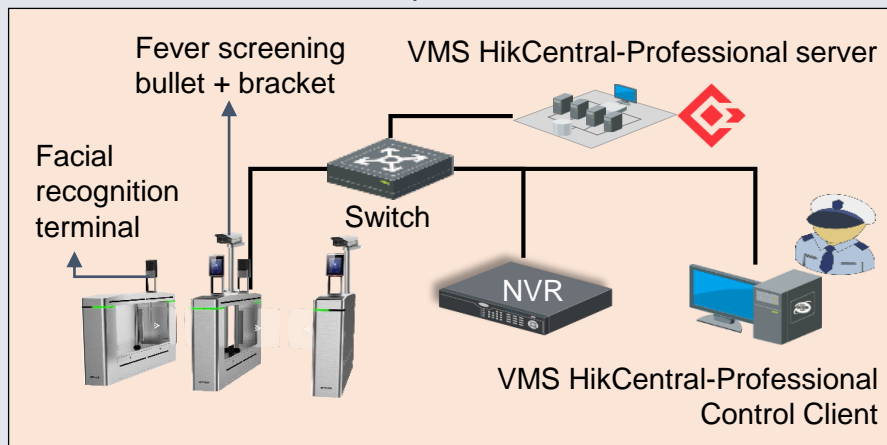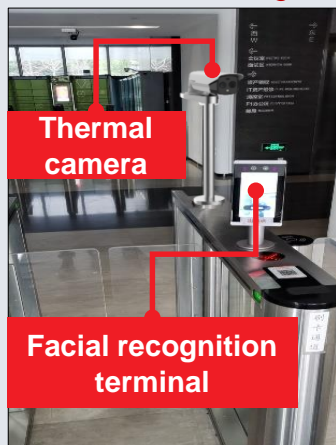


VMS centralized management of the access control system:

- ① Access record with temperature statistics, and can be exported as reports
- ② Real-time fever alarm handling and tracing back
- ③ Open ability of access record with temperature information (Open API)

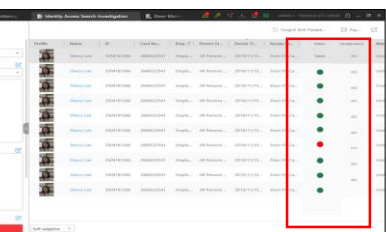

3rd-Party Integration (OA)

Time	ID	CardType	AccessType	AccessTime	AccessPlace	AccessStatus	Body Temperature
2020-10-10 10:10:10	100001	IC	Normal	2020-10-10 10:10:10	100001	Success	36.8
2020-10-10 10:10:10	100001	IC	Normal	2020-10-10 10:10:10	100001	Success	36.8
2020-10-10 10:10:10	100001	IC	Normal	2020-10-10 10:10:10	100001	Success	36.8
2020-10-10 10:10:10	100001	IC	Normal	2020-10-10 10:10:10	100001	Success	36.8

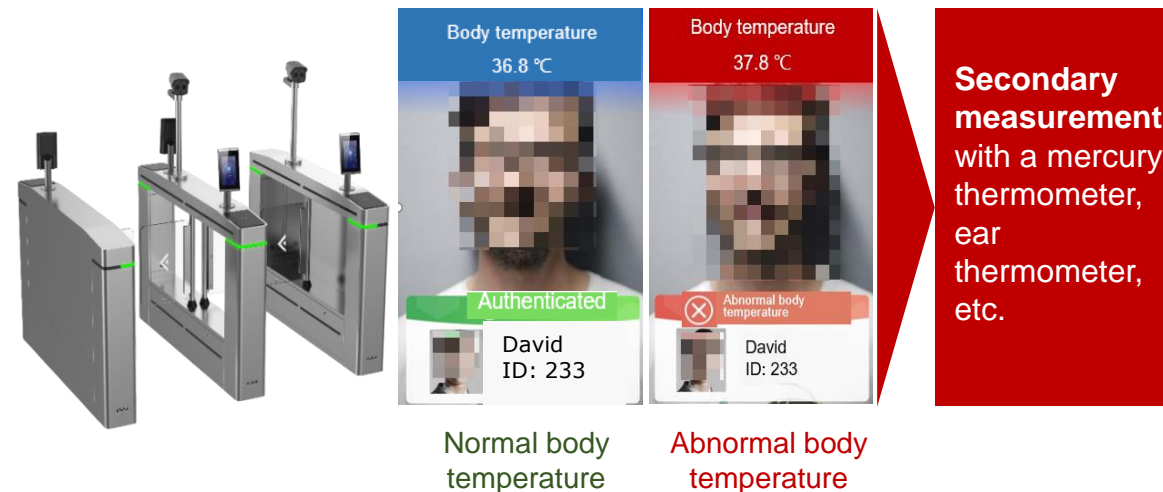

Product Information


- Face recognition & body temperature measurement
- Non-contact fast body temperature measurement (face detection)
- All in one, fast to deploy
- Voice reminder to broadcast real-time alarms
- Face capacity: 20,000
- Passing speed: up to 60 persons/min
- Measurement range: 30-45°C
- Accuracy: $\pm 0.5^{\circ}\text{C}$




Application Scenarios

Note: Indoor installation recommended. The fluctuation in outdoor ambient temperatures influences the accuracy of temperature measurement.

School

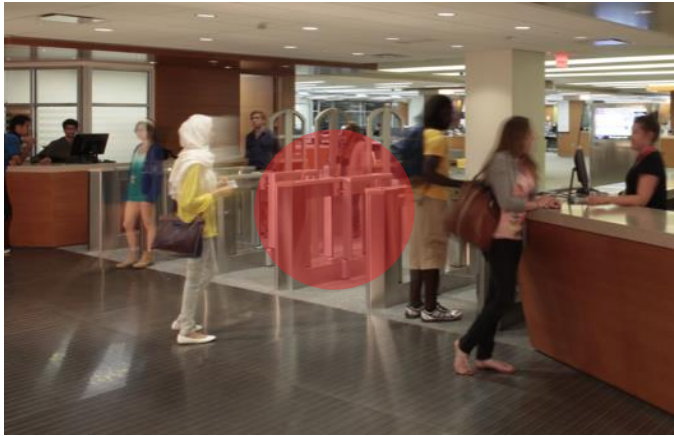

Entrance of library

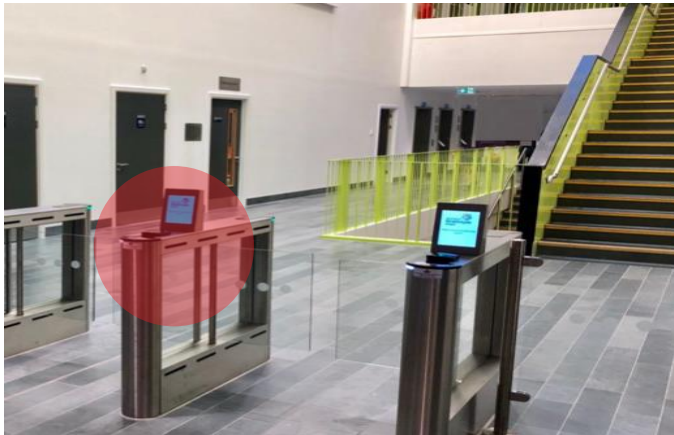

Entrance of dormitory

Factory



Entrance of factory



Entrance of workshop

Commercial Building



Elevator hall of parking lot



Main entrance of office building

Product List

DS-2TD2636B-15/P & DS-2TD2637B-10/P

- Thermal: 384 × 288, lens: 15 mm/10mm ;
- Optical: 2688 × 1520, lens: 6mm/4mm ;
- Accuracy: $\pm 0.5^{\circ}\text{C}$ ($\pm 0.3^{\circ}\text{C}$ with blackbody)
- Measurement range: 30-45 $^{\circ}\text{C}$
- Working temperature: 10-35 $^{\circ}\text{C}$
- AI human body detection, false alarms reduction
- Simultaneous fever screening for multiple persons (Up to 30 persons)



HikCentral Professional

- Flexible, scalable, reliable and powerful central surveillance system
- Supports live view, play back, access control, alarm management, facial recognition, temperature data storage, abnormal temperature trend analysis, etc.
- Centralized management of access control system with real-time fever alarm handling and tracing back



DS-2TD2617B-3/6PA(B)

- Thermal: 160 × 120 ;
- Lens: 3 mm / 6 mm ;
- Optical: 2688 × 1520 ;
- Optical lens: 4 mm / 8 mm ;
- Video mode: Bi-spectrum image fusion ;
- Accuracy: $\pm 0.5^{\circ}\text{C}$ ($\pm 0.3^{\circ}\text{C}$ with blackbody)
- Measurement range: 30-45 $^{\circ}\text{C}$
- Supports audio alarms



DS-2TD1217B-3/6PA(B)

- Thermal: 160 × 120 ;
- Lens: 3 mm / 6 mm ;
- Optical: 2688 × 1520 ;
- Optical lens: 4 mm / 8 mm ;
- Video mode: Bi-spectrum image fusion ;
- Accuracy: $\pm 0.5^{\circ}\text{C}$ ($\pm 0.3^{\circ}\text{C}$ with blackbody)
- Measurement range: 30-45 $^{\circ}\text{C}$
- Supports audio alarms



Blackbody Calibrator

- Temperature resolution: 0.1 $^{\circ}\text{C}$
- Accuracy: $\pm 0.1^{\circ}\text{C}$
- Temperature stability: $\pm 0.1^{\circ}\text{C}/\text{h}$
- Effective emissivity: 0.97 ± 0.02
- Operating temperature: 0-30 $^{\circ}\text{C}$



- Face recognition & body temperature measurement
- Non-contact fast body temperature measurement (face detection)
- All in one, fast to deploy
- Voice reminder to broadcast real-time alarms
- Face capacity: 20,000
- Passing speed: up to 60 persons/min
- Measurement range: 30-45 $^{\circ}\text{C}$
- Accuracy: $\pm 0.5^{\circ}\text{C}$



DS-K5671-ZU+DS-2TD2617B-3/6PA(B)

DS-K3B601-L/Mpg-Dp65 or DS-K3B601-M/Mpg-InTtNDp65 or DS-K3B601-R/MpgTtN-Dp65

DS-2TP21B-6AVFW

- Thermal resolution: 160 × 120 ;
- Optical resolution: 640 × 480 ;
- Measurement range: 30-45 $^{\circ}\text{C}$
- Touch screen
- Accuracy: $\pm 0.5^{\circ}\text{C}$ ($\pm 0.3^{\circ}\text{C}$ with blackbody)
- Bi-spectrum image fusion
- Supports Wi-Fi
- Supports audio alarms
- Automatic screenshots & uploading





See far, go further



مدينة الأعمال
BUSINESS CITY

Kingdome of Saudia Arabia

Address: Riyadh - P.O.BOX 7157, Postal Code 13242

Branches: Dammam - Jeddah

Sales: 0500019900 | 0544515434 | 0599969397

Phone: 0112531555 | Fax: 0114778555

Unified Number: 920014344